

LED

# Marte 200 CCT LED

cod. FDL-200120DD-CCT



Studio Marte 200 CCT is a cutting-edge LED floodlight with dynamic white adjusting. The correlated color temperature is adjustable from 3000 K to 5700 and Dimmer control from 0 to 100% by DMX signal and Digital display integrated. Possibility to rewrite the color temperature displayed on the LCD display.

Aluminum alloy sheet shell, excellent for the light and thin, simple and sleek, double modular structure, easy handling, maintenance friendly, LED cold and warm light sources, matrix distribution, high-light diffusion plate, soft and smooth light output, no infrared, ultraviolet rays, no glare, better energy saving than the traditional three-band fluorescent Lamp. The double-balance heat conduction technology and natural flow type heat dissipation design are used to export a greater flow of energy effectively with noise free. 120° ultra beam angle ensure the large-area diffused lighting and viewfinder. It can be used as auxiliary lighting applications.

Input: 220-250Vac 50Hz / 60Hz.

200W ultra-bright and high-quality LED.

Tunable white from 3000 K to 5700 K.

CRI 95.

TLCI>90.

DMX 512 control.

2/5 Channels function selectable.

LCD display showing the set values.

Rewrite the color temperature displayed on the LCD display function.

Control system: 16 Bit dimming.

Max Clock frequency: 72m/Hz.

Dimming Frequency: 8k/Hz.

Control connections, Neutrik XLR 5P In&Out.

Power Connections, Neutrik Powercon In&Out.

Heatsink without any fan, 0 db.



Tilt:  $\pm 90^\circ$ .

Barndoor 4 leaves included.

Protection rate: IP23

Working Environment -20....35°C

Weight: 7,8Kg.

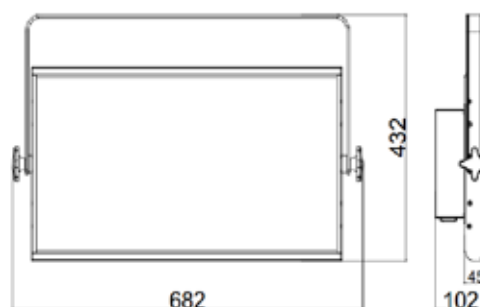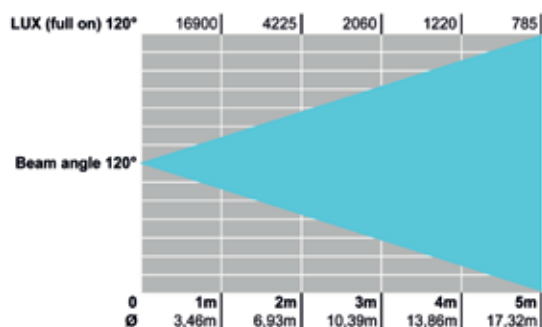

Arena Luci s.r.l. si riserva la facoltà di modificare le caratteristiche dei prodotti senza obbligo di preavviso

*Arena Luci s.r.l. reserve the right to change products specifications at anytime without prior notice*