

Panneaux Led

FILMGEAR®

Marque : FILMGEAR

ZENITH 1500c



Éclairer pour sublimer

SPECIFICATIONS

LAMPHEAD CONTENTS

- Lamp Housing with Power Cable
- Stirrup with Ø28mm (1-1/8 in.) Spigot
- Diffuser
- AC Power Cable

Zenith 1500C

SPECIFICATIONS

Identity No.	L0150PPC
Max. Capacity	1580W
Input Voltage	100 - 240V AC
Input Current	7.2A@220V AC
Color Temp. Range	2700K ~ 10000K
Color	R/G/B/W color mixing
CRI	Average >95
TLCI	Average >90
Dimming Range	0-100%
Control Signal	DMX / RDM
Communication	DMX XLR-5, CRMX (LumenRadio), Bluetooth, Ethernet, USB A
LED Lifetime	30,000 Hrs (Estimated)
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 65
Weight (Lamphead)	49kg

ACCESSORIES

- 4-leaf Barndoor
- Softbox
- Dome Diffuser
- Eggcrate for Softbox
- Bluetooth Remote Control




Control Panel



ZENITH 1500c

DIMENSIONS (mm)

DIMENSIONS (mm)

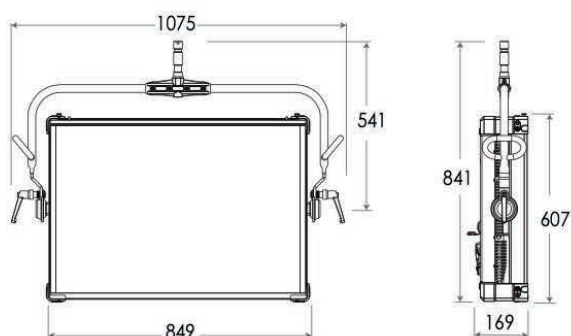

PHOTOMETRIC DATA



5600K	Lux	63000	21500	10300	5750
22°	Beam Ø1.17m	1.94m	2.72m	3.50m	
3200K	Lux	63400	21700	10400	5810
22°	Beam Ø1.17m	1.94m	2.72m	3.50m	

Naked, without diffuser